



## Premium Asymmetric Slatted Cladding Board

<b>Composition:</b>	<ul style="list-style-type: none"> <li>• 55% – wood flour</li> <li>• 35% – high-density polyethylene (HDPE)</li> <li>• 10% – anti-UV additives, stabilizers, colourants</li> </ul>
<b>Dimensions:</b>	<ul style="list-style-type: none"> <li>• thickness – 24 mm (± 0,5 mm)</li> <li>• width – 217 mm (± 3,0 mm)</li> <li>• length – 2900 mm (± 5,0 mm)</li> <li>• weight – 3 kg/mb (-5% / +10%)</li> </ul>
<b>Properties:</b>	<ul style="list-style-type: none"> <li>• use in temperatures (-30 °C/+60 °C1)</li> <li>• low water absorption &lt;0.7% (frost-resistant)</li> <li>• high resistance to UV</li> <li>• high resistance to cracking (excluding cracks caused by shock load), rotting and decay resulting from the direct action of fungi and bacteria</li> <li>• high resistance to damage caused by the direct impact of insects</li> <li>• polymer coating for increased stain resistance and color durability</li> </ul>
<b>Application:</b>	<ul style="list-style-type: none"> <li>• facades</li> <li>• wall development</li> <li>• garden architecture</li> </ul>

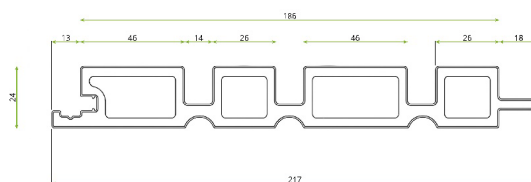

### Available colours:

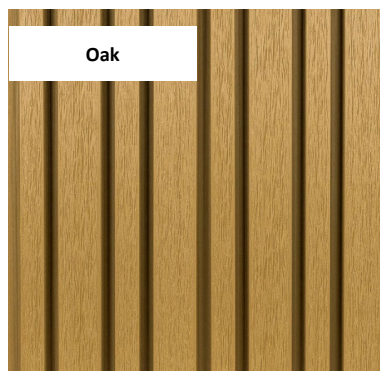

EcoTravers cladding boards should not be installed in closed, damp and unventilated rooms, as well as in places with rapid and significant temperature changes (e.g. sauna).

**Before installation read the instructions on [www.liderwood.com](http://www.liderwood.com).**

During the first exploitation period the composite boards age under the influence of external conditions. The color stabilizes after a few months, reaching its final saturation. EcoTravers composite products may deviate from the available descriptions and samples in terms of natural color or structure differences. The boards may be subject to slight deformation (~1.5%).

### Available documents:

- Guarantee certificate
- Installation instructions
- Rules for the use and care of products
- Rules and conditions for proper storage of products

**Please note: The colour shading and fluting/brushing of the system mouldings and angle mouldings differs from the finish of the façade slats.**