

## Seamless Composite Decking Board

**Composition:**

- 55% – wood flour
- 35% – high-density polyethylene HDPE
- 10% – anti-UV additives, stabilisers, colourants

**Dimensions:**


- thickness – 23 mm ( $\pm 0,5$  mm)
- width – 145 mm ( $\pm 1,0$  mm)
- length – 3/4 m ( $\pm 5$  mm)
- linear weight – 3,0 kg/mb (-5%/+10%)

**Properties:**


- suitable for use at temperatures from -30°C/+60°C
- low water absorption <0.7% (frost-resistant)
- high UV resistance
- high crack resistance (excluding cracks caused by impact loads)
- high resistance to rot and decay caused by direct exposure to fungi and bacteria
- high resistance to damage caused by direct insect activity
- reinforced solid internal structure
- polymer coating enhancing stain resistance and colour durability

**Usage:**

- terraces
- stairs
- pathways
- balconies
- fences
- outdoor pool enclosure
- fencing

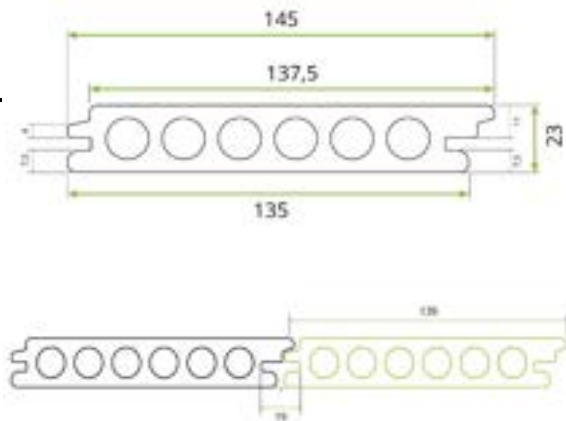

**Available documents:**

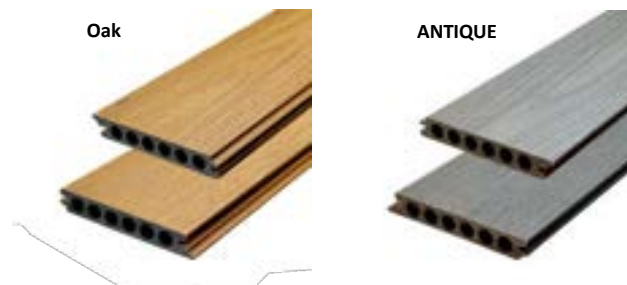

EcoTravers decking boards should not be installed in closed, damp and unventilated rooms, as well as in places with rapid and significant temperature changes (e.g. sauna).

Before installation read the instructions on [www.liderwood.com](http://www.liderwood.com).

During the first exploitation period the composite boards age under the influence of external conditions. The color stabilizes after a few months, reaching its final saturation. EcoTravers composite products may deviate from the available descriptions and samples in terms of natural color or structure differences. The boards may be subject to slight deformation (~1.5%).

**Available documents:**

- Guarantee certificate
- Rules for Use and Maintenance of the EcoTravers Decking System
- Installation instructions
- Rules and Conditions for Proper Product Storage