

Acoustic Interior Slatted Wall Panels on Felt

Composition:

- MDF Board
- Polyester


Dimensions:

- thickness – 20 mm ($\pm 0,5$ mm)
- width – 320 mm ($\pm 1,0$ mm)
- length – 2700 mm


Properties:

- Thick, durable felt with sound-absorbing properties - grammage: 1700 g/m²
- Flexible felt that allows you to adjust the slats to the surface
- The noise reduction factor (NRC) is 0,85 (tested according to ISO 354-2003).

Usage: Walls and ceilings in interiors in public and private spaces

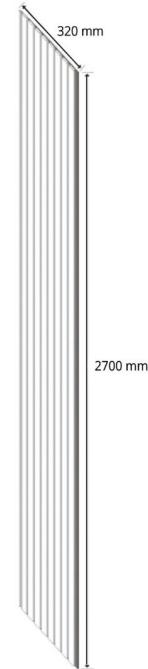

Available colours:

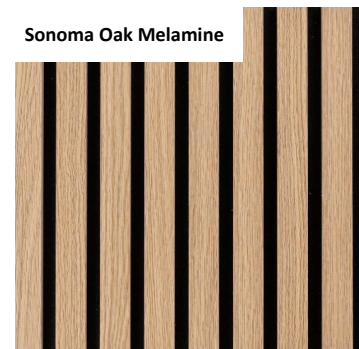

Acoustic interior slatted wall panels on felt should not be installed in closed, damp and unventilated rooms, as well as in places with rapid and significant temperature changes (e.g. sauna).

Before installation read the instructions on www.liderwood.com.

Available documents:

- Guarantee certificate
- Installation instructions